

VAPORIZZATORI GPL AD ACQUA


LPG WATER VAPORIZERS

VAPORISATEURS GPL À EAU

100 - 200 - 300 Kg/h

Tipo feed-out

COPRIM - ITALY

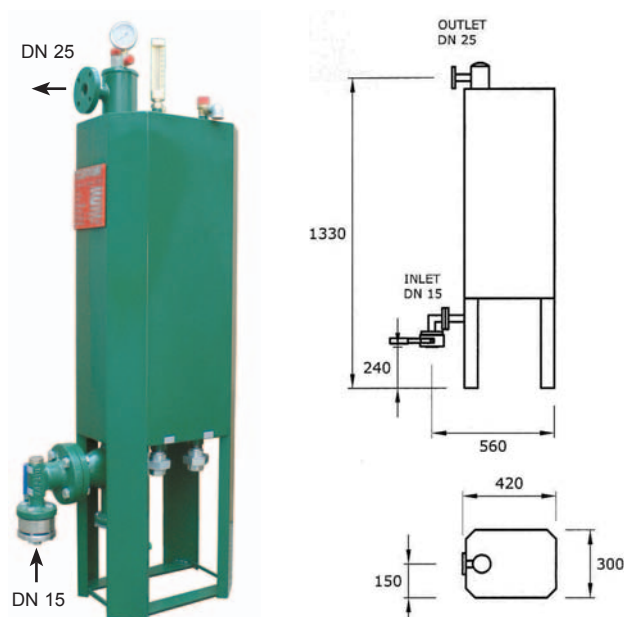

weight 100 Kg

Mod.


Cod.

100 kg/h

1.03.70

200 kg/h

1.03.75

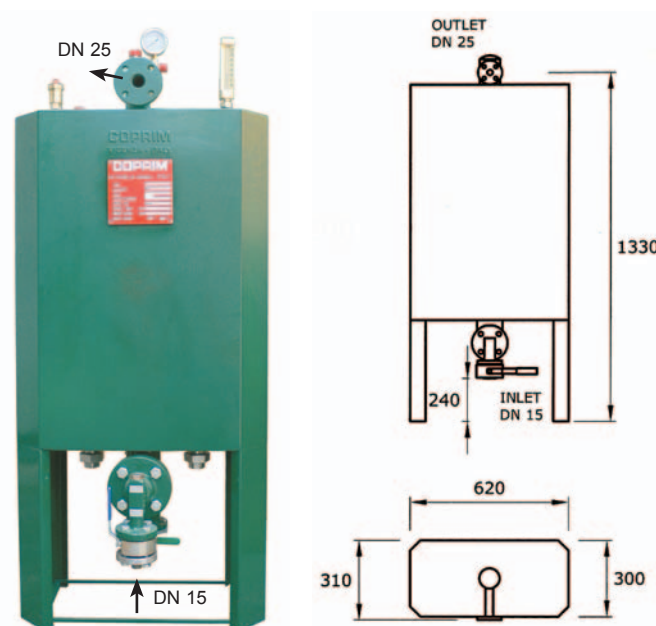


weight 150 Kg

Mod.

Cod.

300 kg/h

1.03.80

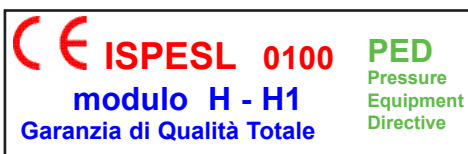

temperatura progetto TS - 40 +120 °C

design temperature - température du projet

pressione progetto PS 40 bar

design pressure - pression du projet

SPECIFICA

- Manometro Ø 60 25 bar
- Valvola di sicurezza 1/2" 18 bar
- Termometro -20 + 120 °C
- Filtro
- Valvola a sfera DN 15 PN 40
- Valvola di sicurezza acqua 1,5 bar
- Valvola di sfiato aria

Entrata acqua 1"
Uscita acqua 1"

SPECIFICATION

- Manometer Ø 60 25 bar
- Safety valve 1/2" 18 bar
- Thermometer -20 + 120 °C
- Filter
- Ball valve DN 15 PN 40
- Water safety valve 1,5 bar
- Air breather valve

Inlet water 1"
Outlet water 1"

DETAIL


- Manomètre Ø 60 25 bar
- Soupape de sécurité 1/2" 18 bar
- Thermomètre -20 + 120 °C
- Filtre
- Vanne sphérique DN 15 PN 40
- Soupape de sécurité eau 1,5 bar
- Soupape de purgeur d'air

Entrée eau 1"
Sortie eau 1"

VAPORIZZATORI GPL AD ACQUA
LPG WATER VAPORIZERS
VAPORISATEURS GPL À EAU

500 - 750 - 1000 Kg/h
 Tipo feed-out

COPRIM - ITALY

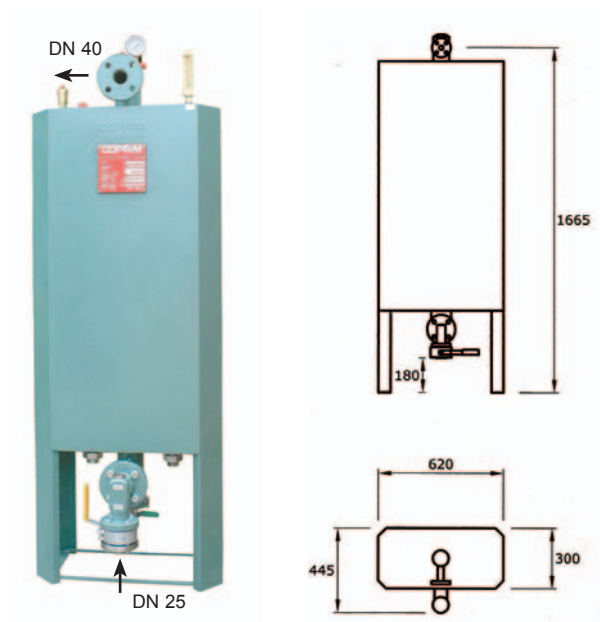


weight 200 Kg

Mod.

Cod.

500 kg/h

1.03.85

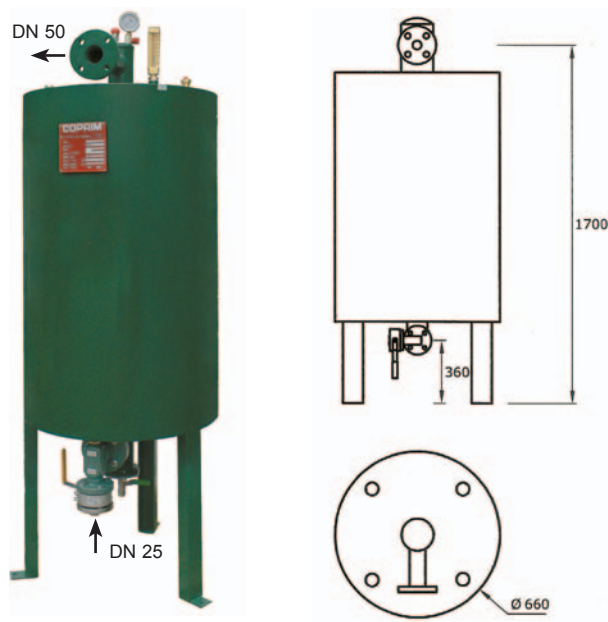

weight 300 Kg

Mod.


Cod.

750 kg/h

1.03.90

1000 kg/h

1.03.91

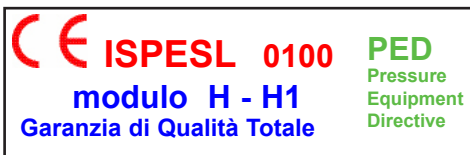

temperatura progetto TS - 40 +120 °C
 design temperature - température du projet

pressione progetto PS 40 bar
 design pressure - pression du projet

SPECIFICA

- Manometro Ø 60 25 bar
- Valvola di sicurezza 1/2" 18 bar
- Termometro -20 + 120 °C
- Filtro
- Valvola a sfera DN 25 PN 40
- Valvola di sicurezza acqua 1,5 bar
- Valvola di sfiato aria

Entrata acqua 1" 1/2
 Uscita acqua 1"1/2

SPECIFICATION

- Manometer Ø 60 25 bar
- Safety valve 1/2" 18 bar
- Thermometer -20 + 120 °C
- Filter
- Ball valve DN 25 PN 40
- Water safety valve 1,5 bar
- Air breather valve

Inlet water 1"1/2
 Outlet water 1"1/2

DETAIL

- Manomètre Ø 60 25 bar
- Soupape de sécurité 1/2" 18 bar
- Thermomètre -20 + 120 °C
- Filtre
- Vanne sphérique DN 25 PN 40
- Soupape de sécurité eau 1,5 bar
- Soupape de pugeur d'air

Entrée eau 1"1/2
 Sortie eau 1"1/2

VAPORIZZATORI GPL AD ACQUA Tipo feed-back

LPG WATER VAPORIZERS



VAPORISATEURS GPL À EAU

ATEX

COPRIM - ITALY



VAP.	Cod.
100 Kg/h	1.02.66
200 kg/h	1.02.68
300 Kg/h	1.02.70
500 Kg/h	1.02.72
1.000 Kg/h	1.02.74
2.000 Kg/h	1.02.76

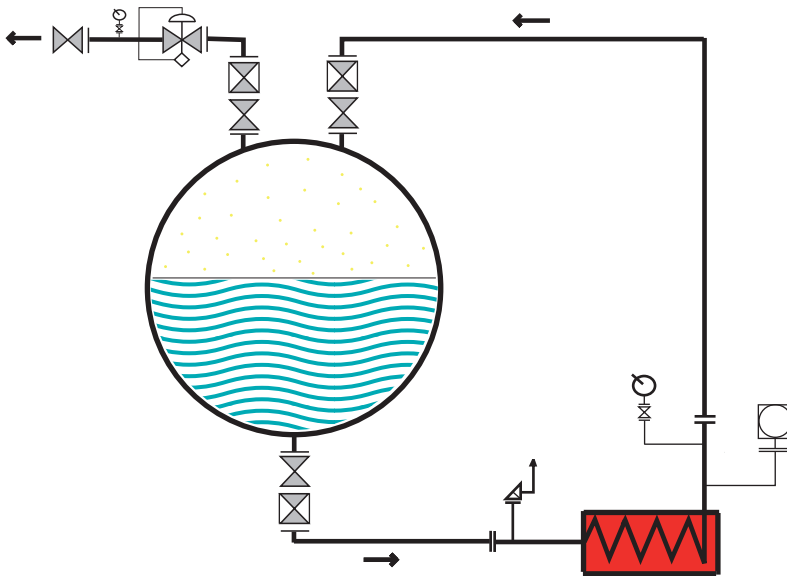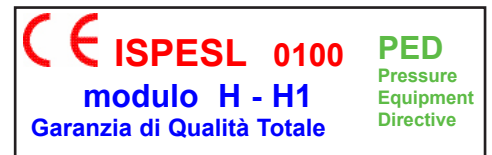

temperatura progetto TS - 40 +120 °C

design temperature - température du projet

pressione progetto PS 40 bar

design pressure - pression du projet

SPECIFICA

- Manometro Ø60 25 bar con contatti
- Valvola di sicurezza 1/2" 18 bar
- Termometro -20 + 120 °C
- Valvola di sicurezza acqua 1,5 bar
- Valvola di sfiato aria
- Pressostato

Entrata acqua 1"
Uscita acqua 1"

SPECIFICATION

- Manometer Ø60 25 bar with contact
- safety valve 1/2" 18 bar
- Thermometer -20 + 120 °C
- Water safety valve 1,5 bar
- Air breather valve
- Pressure switch

Inlet water 1"
Outlet water 1"

DETAIL

- Manomètre Ø60 25 bar
- Valve de sécurité 1/2" 18 bar
- Thermomètre -20 + 120 °C
- Soupape de sécurité eau 1,5 bar
- Soupape de pugeur d'air
- Pressostat

Entrée eau 1"
Sortie eau 1"